JIB500GR

BEAM & PIPE MANIPULATOR

Lifting capacity
500 kg

Dimensions (l x w x h)
1260 x 620 x 1650 mm

Activation
Hydraulic

Weight
230 kg

EN [m - kg]

TOOL COMPATIBLE WITH JEKKO MINI CRANES SPX532, SPX650 AND SPX1280

Jekko s.r.l. • info@jekko.it • www.jekko-cranes.com

DIMENSIONS(mm)

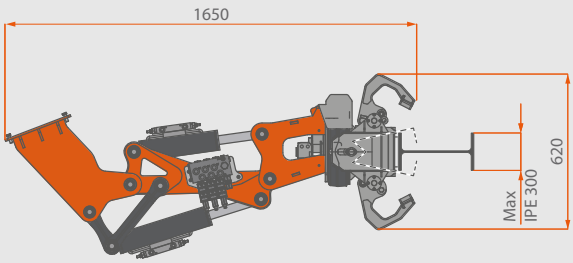



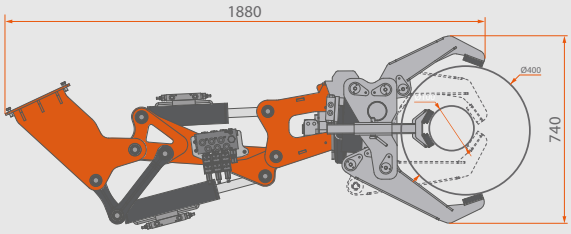



MOVEMENTS

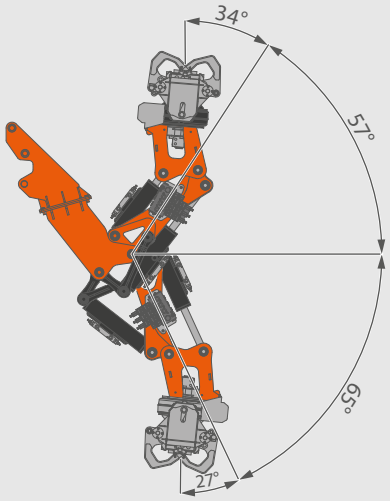

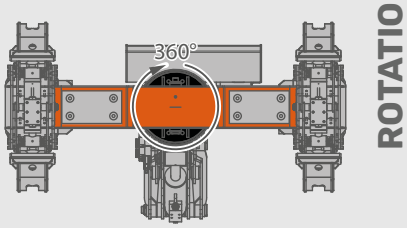

500KG LIFTING CAPACITY

DEDICATED BEAMS & PIPES CLAMPS

- Beam clamp: for IPE, HEA, HEB and similar
- Pipe clamp: for 100-400 mm diameter
- Quick clamp installation

WIDE MOVEMENTS RANGE

- 360° continuous rotation
- Wide tilt with double articulation:
  - 57° / +65° tilt A
  - 34° / +27° tilt B

PLUG & PLAY

- Completely hydraulic
- Fully integrated with the crane
- Controlled by crane radio control

TRANSPORT TRAY

- Practical and sturdy
- Easy to install

*Optional

Jekko s.r.l. • info@jekko.it • www.jekko-cranes.com

Specifications are subject to change without notice.
All data provided is for reference purposes only and is not legally binding.